

Self Retractable Lifeline


20 METERS WITH RESCUE WINCH

This range of retractable fall limiters are encased in nearly indestructible plastic to give them an edge on sites where they are used. The fall limiters have been tested rigorously in all types of situations.

TECHNICAL SPECIFICATION

HEIGHT SAFETY

FAR0730

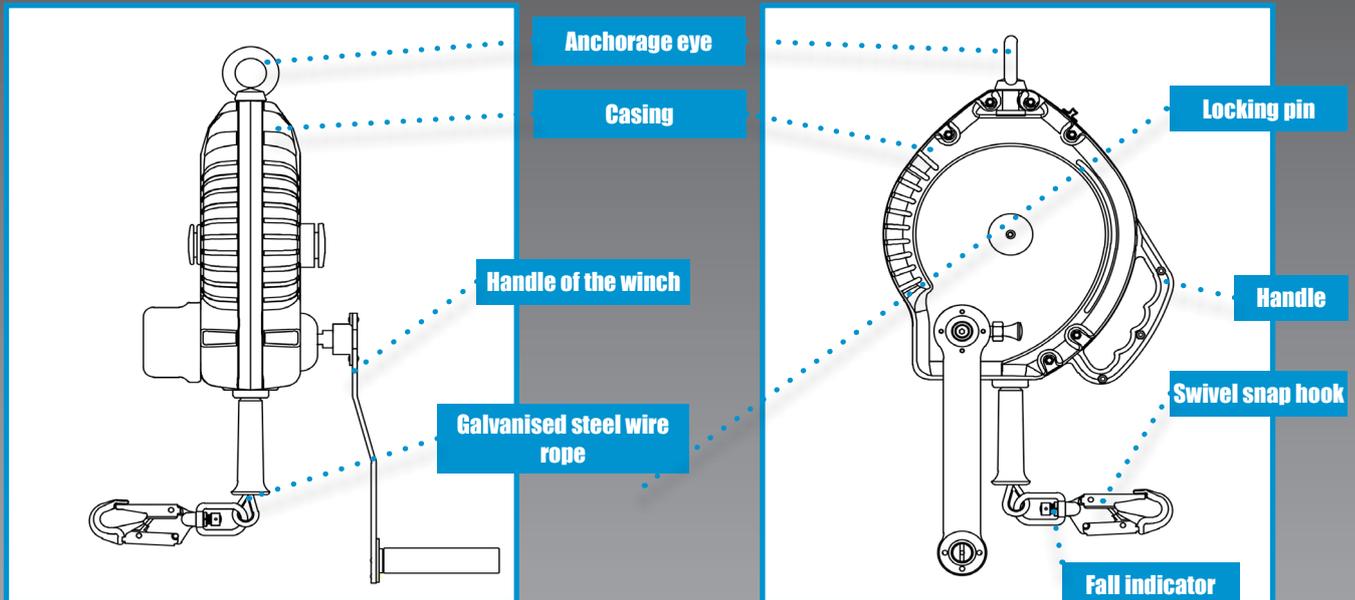

CABLE

Material: Galvanised steel wire rope

Diameter: 4.5 mm

Minimum Breaking strength: 15 kN

DIMENSIONS

Length: 20 meters

Weight: 9.25 kg (+/- 100 g)

CLEANING & MAINTENANCE

In case of minor soiling, wipe the equipment with a cotton cloth or soft brush. Do not use any abrasive material. For intensive cleaning wash in water at a temperature between 25°C to 50°C using a neutral detergent. It should be allowed to dry by itself and be kept away from open fires/flames or any other source of heat. Avoid direct sunlight.

The user should carry out a pre-use check of the Self Retractable Lifeline, to ensure that it is in a serviceable condition and operates correctly before it is used.

The pre-use check shall involve checking of any wear or abrasion on wire ropes/webbing and sign of corrosion if any on metal parts or any breakage of the casing.

CHARACTERISTICS

Self-retractable lifeline in polymer casing which is coupled with hoisting winch to enable easy retrieval of victim.

The locking pin on the side of the casing at the base of the handle allows this dual system to work in independent fall arrest & winch modes.

Swivel anchorage eye at anchorage end.

Comes with a unique hydro seepage system to drain clogged water which accumulates in the block during usage.

1 screw gate aluminium connector at the anchorage point. Gate opening: 22 mm. Conforms to EN362:2004 Class B

Steel swivel snap hook with load indicator at the attachment point, gate opening 20 mm, conforms to EN362:2004 Class T.

CONFORMITY

EN 360: 2002 & EN 1496: 2017 Class B. Rated to 140 kg.

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 12 kN for 3 min

Dynamic strength: 100 kg mass free fall of 600 mm with the breaking force of less than 6 kN & arrest distance less than 2 meters.

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



MANUFACTURING FOR SAFETY
WWW.JPSAFETY.COM

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 27/10/2020-1